STATION	CUMULATIVE CHAINAGE	CHAINAGE	DEPTH OF CUT	INVERT LEVEL	GROUND LEVEL
EsMH	0.00	0.00	3.40	916.660	920.060
1	25.00	25.00	3.30	916.690	919.990
2	50.00	25.00	2.80	916.885	919.785
3	80.00	30.00	2.80	917.310	920.110
4	110.00	30.00	2.40	917.550	919.950
5	140.00	30.00	2.20	917.935	920.135
6	170.00	30.00	2.20	918.726	920.926
7	200.00	30.00	2.40	919.483	921.883
8	240.00	40.00	2.30	920.616	922.916
9	280.00	40.00	2.10	921.615	923.715
10	310.00	30.00	2.40	922.412	924.812
11	340.00	30.00	3.90	923.226	926.526
12	370.00	30.00	3.20	924.013	927.213
13	400.00	30.00	2.20	924.814	927.014
14	430.00	30.00	2.40	925.098	927.498
15	460.00	30.00	2.20	925.450	927.650
16	500.00	40.00	2.00	925.805	927.805
17	535.00	35.00	1.80	926.134	927.934
18	565.00	30.00	2.20	926.495	928.695

Scanned with ACE Scanner

AE - SUD

ALEESHA

Scanned with ACE Scanner

Estimate for the work of P & L of 400mm dia RCC NP3 Class sewer line to divert sewage lode to the 900mm dia from ...
at Lalbagh Main toad from Subbiah Circle to Nala Road, Coming under Banappa Park S/Stn, area of AEESW-1 Sub Dvn.

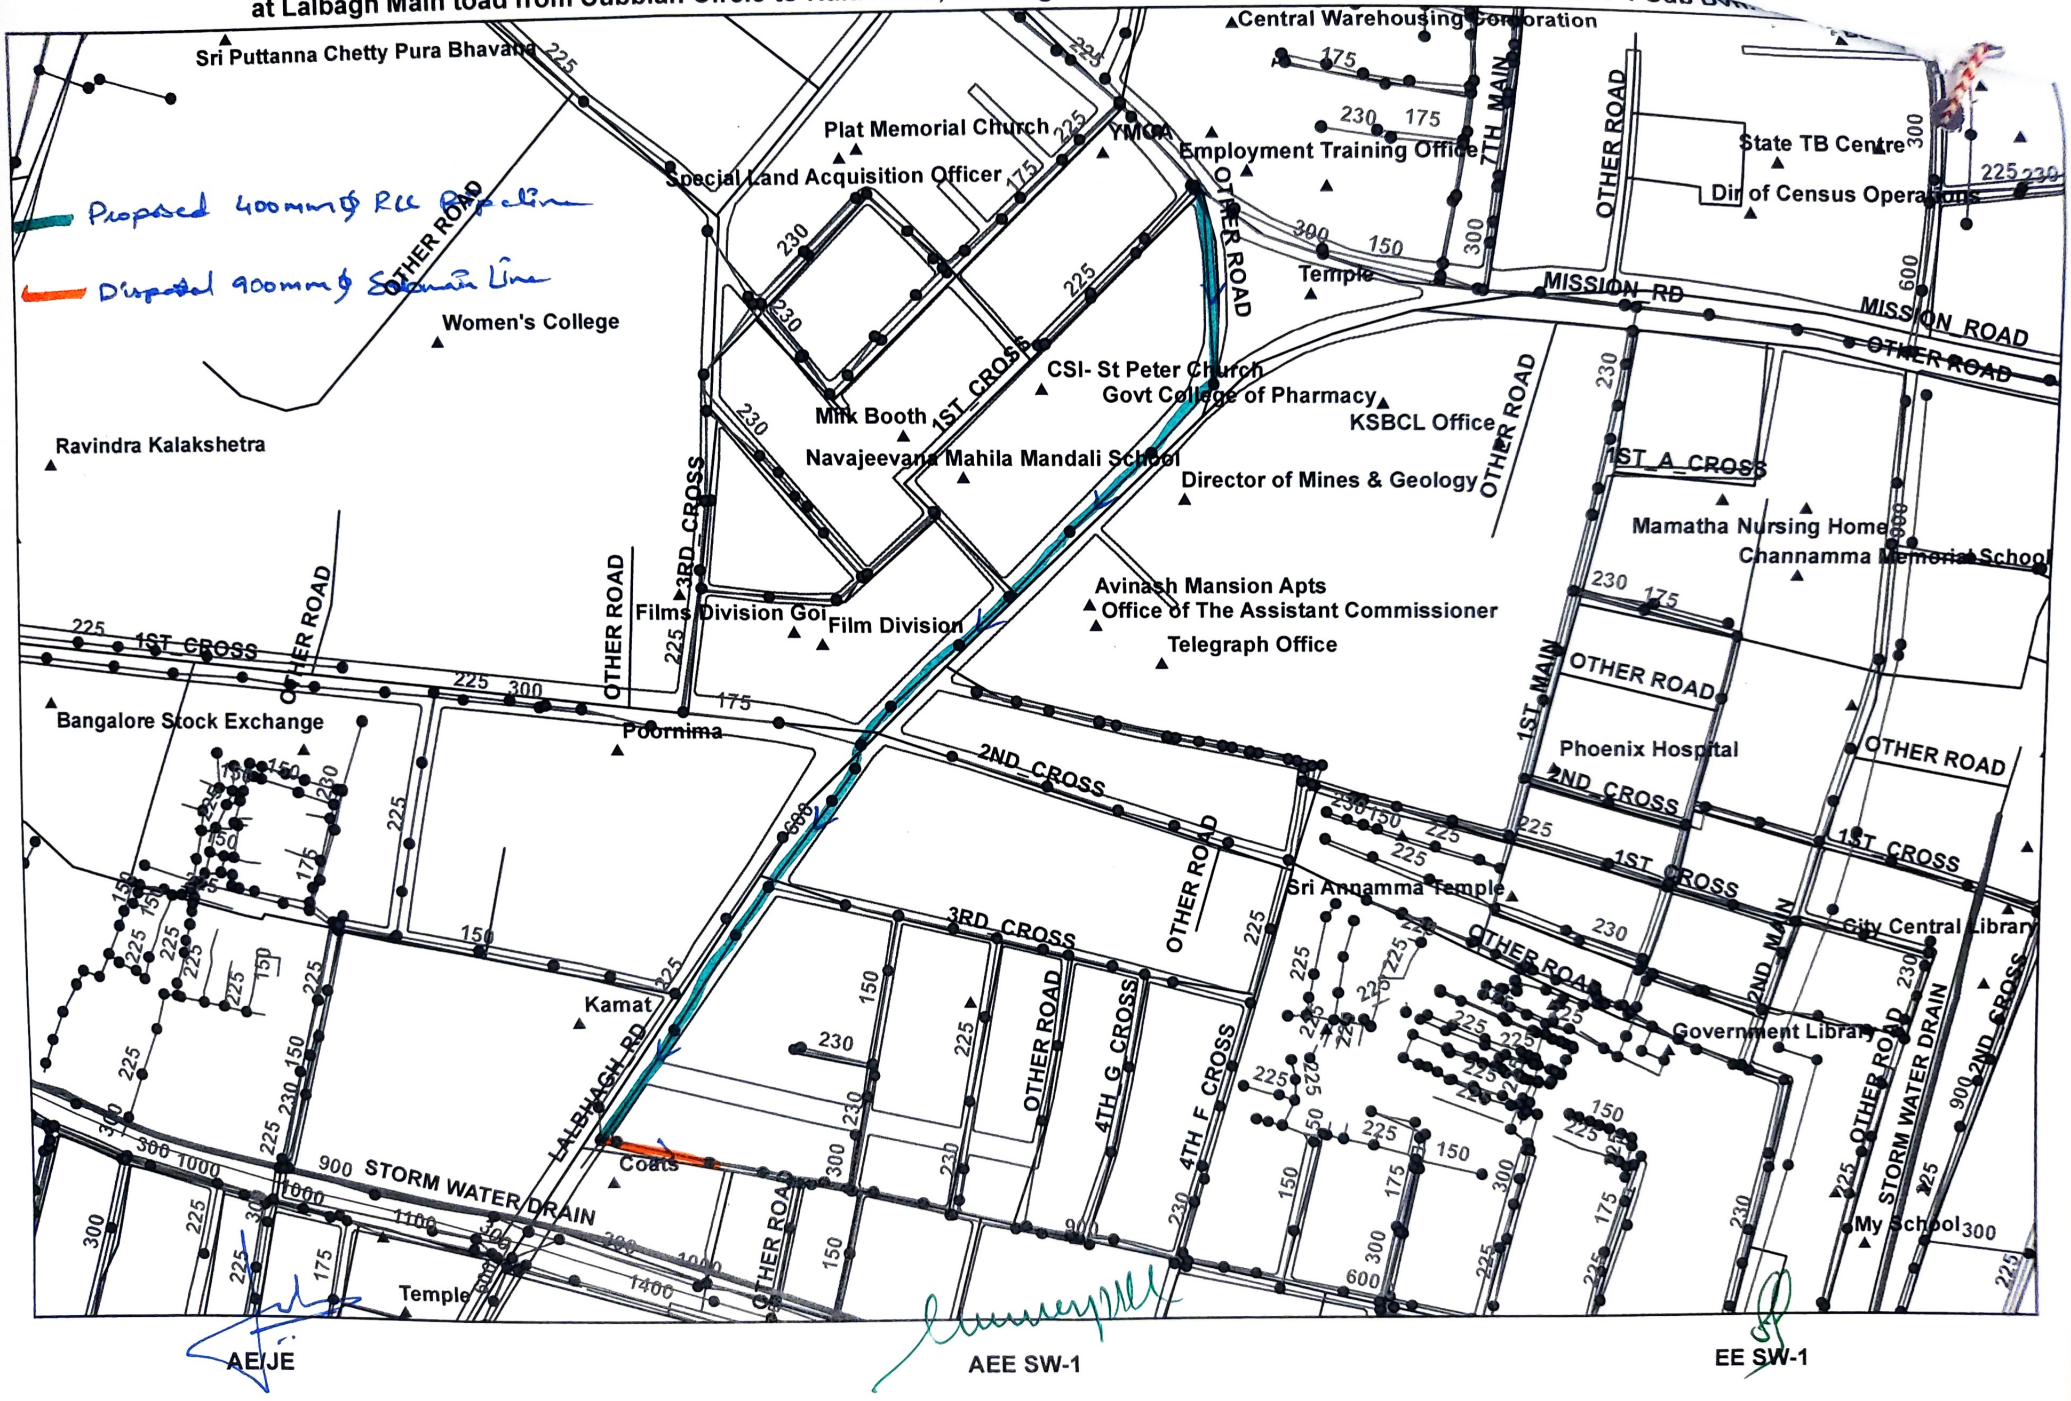

AE/JE

AEE SW-1

EE SW-1

Scanned with ACE Scanner